



**ENVIRONMENTAL PERMIT NO.  
EP-286/2007/B AND EP-01/286/2007/A**

**EXPANSION OF HELIPORT FACILITIES  
AT MACAU FERRY TERMINAL  
Monthly EM&A Report No. 19  
(10 October 2009 – 9 November 2009)**

Prepared for:  
Hip Hing Construction Company Limited

Prepared by:  
ENVIRON Hong Kong Limited

Date: November 2009


Reference: R0927\_V1.0

**ENVIRONMENTAL PERMIT NO.  
EP-286/2007/B AND EP-01/286/2007/A**

**EXPANSION OF HELIPORT FACILITIES  
AT MACAU FERRY TERMINAL**

**Monthly EM&A Report No. 19  
(10 October 2009 – 9 November 2009)**

Certified by:



---

David Yeung  
Environmental Team Leader

Verified by:



---

Anne F Kerr  
Independent Environmental Checker

Date: 23 November 2009

Pursuant to Condition 1.9 of the Environmental Permits EP-286/2007/B and EP-01/286/2007/A, this Monthly EM&A Report No. 19 has been reviewed and certified by the Environmental Team Leader and verified by the Independent Environmental Checker.

**ENVIRON Hong Kong Limited**

Address: 2310, China Resources Building, 26 Harbour Road, Wan Chai

Tel: 37430788

Fax: 35486988

E-mail: [hkinfo@environcorp.com](mailto:hkinfo@environcorp.com)

Q:\Projects\HHCHELIPEM00\Report\Monthly EM&A Report\No.19\R0927\_V1.0.doc

## Table of Contents

	<b>Page</b>
<b>1 INTRODUCTION</b>	<b>2</b>
1.1 Basic Project Information	2
1.2 Coverage of this EM&A Report	3
1.3 Project Organization and Management Structure	3
<b>2. ENVIRONMENTAL STATUS</b>	<b>4</b>
2.1 Works Undertaken in the Reporting Period	4
2.2 Works Anticipated for the Next Reporting Period	4
2.3 Environmental Permits and Licenses	4
2.4 Environmental Submissions	5
2.5 Environmental Meetings	5
<b>3. EM&amp;A REQUIREMENTS</b>	<b>6</b>
3.1 Summary of Construction Phase EM&A Requirements	6
3.2 Implementation of Environmental Mitigation Measures	10
<b>4. MONITORING AND AUDIT RESULTS</b>	<b>11</b>
4.1 Impact Monitoring and Audit in the Reporting Period	11
4.2 Waste Management	11
4.3 Summary of Environmental Complaints, Notifications of Summons and Prosecutions	12
4.4 Environmental Exceedances / Non-Compliances	12
<b>5. FUTURE KEY ISSUES</b>	<b>14</b>
5.1 Key Issues to be Considered for the Coming Month	14
5.2 Construction Programme for Upcoming Periods	14
<b>6. CONCLUSIONS AND RECOMMENDATIONS</b>	<b>15</b>
6.1 Conclusions	15
6.2 Recommendations	15

## List of Tables

Table 1	Key Personnel Contact Details of Different Project Parties .....	3
Table 2	Summary of Environmental Permits, Licenses and Notification to EPD for the Project .....	4
Table 3	Summary of Environmental Related Document Submission for the Project .....	5
Table 4	Summary of Waste Generated in October 2009 .....	11
Table 5	Statistical Summary of Environmental Complaints, Notifications of Summons and Successful Prosecution .....	12
Table 6	Summary of the Findings from the Environmental Site Inspections .....	13

## List of Figure

Figure 1	The Project Site Layout
----------	-------------------------

## **List of Appendices**

- Appendix A Project Organization Chart
- Appendix B Tentative Construction Programme of the Project
- Appendix C Implementation Schedule of Recommended Mitigation Measures
- Appendix D Summary of Waste Flow Table
- Appendix E Complaint Investigation Procedures, Complaint Log, Flow Diagram and Details of Community Liaison Office
- Appendix F Inspection Record of the Effluent Discharge

## EXECUTIVE SUMMARY

The Expansion of Heliport Facilities at Macau Ferry Terminal (hereinafter referred to as “The Project”) has been awarded to Hip Hing Construction Company Limited by Sky Shuttle Helicopters Limited (formerly known as Heli Express Limited). The construction works under this Contract has commenced on 10 April 2008.

ENVIRON Hong Kong Limited has been appointed by Hip Hing Construction Company Limited (hereinafter referred to as “The Contractor”) as the Environmental Team (hereinafter referred to as “ET”) to implement the Environmental Monitoring and Audit (hereinafter referred to as “EM&A”) programme as identified in the EIA Report and the Final EM&A Manual for the Project (EIA Register No.: AEIAR-095/2006) approved by EPD on 8 February 2006.

The EM&A programme for the Project has commenced on 10 April 2008. This is the 19<sup>th</sup> Monthly EM&A report for the construction phase of the Project covering the reporting period between 10 October 2009 and 9 November 2009. This report documents the environmental monitoring and audit works, results and findings, list of activities, and environmental mitigation measures implemented in the reporting period.

As according to the EM&A Manual for the Project, no impact monitoring of air, noise and water quality is required to be carried out during the construction phase of the Project. Site inspection is to be carried out on a weekly basis to monitor proper implementation of environmental mitigation measures and to identify possible environmental discrepancies arising from the Project.

The weekly site inspections have been conducted on 15, 22 & 29 October 2009 and 5 November 2009 in the reporting period.

No site inspection was carried out by EPD in the reporting period.

Regular inspection and surveillance have been conducted by the ET during the reporting period to monitor the site effluent conditions especially at the discharge point.

Daily inspection for the discharge effluent was carried out by the Contractor and the inspection record has been checked and reviewed by the ET.

In general, the Contractor has prepared to implement all required environmental mitigation measures and has been responsive to ET’s recommendations on the environmental discrepancies observed during the weekly environmental site inspections within the reporting period.

No environmental complaints, notification of summons and prosecution of the Project were received in the reporting period.

No non-compliances with regard to site environmental inspections were observed in the reporting period.

# 1 INTRODUCTION

## 1.1 Basic Project Information

- 1.1.1 This Project – “Expansion of Heliport Facilities at Macau Ferry Terminal” (hereinafter referred as “MFT”) is categorized as a Designated Project under the EIA Ordinance. Environmental Permit is required to construct and operate the Project. An Environmental Permit (EP No. EP-286/2007) was issued to Heli Express Limited by EPD on 27 September 2007. This Contract for the construction of the project has been awarded to the Contractor – Hip Hing Construction Company Limited. A Further Environmental Permit (EP No. FEP-01/286/2007) was issued to Hip Hing Construction Company Limited by EPD on 20 February 2008. These two Environmental Permits were subsequently varied as EP-286/2007/A and EP-01/286/2007/A respectively (hereinafter referred to as “EP”) and were granted by EPD on 31 March 2008. A varied Environmental Permit (EP No. EP-286/2007/B) was issued to Sky Shuttle Helicopters Limited (formerly known as Heli Express Limited) by EPD on 5 March 2009.
- 1.1.2 In accordance with Condition 1.11 of the EP, the Contractor has notified EPD in writing the commencement date of the Project to be on 10 April 2008. According to Special Condition 2.1 of the EP and the contract requirement, the Contractor has appointed ENVIRON Hong Kong Limited as the Environmental Team (ET) of the Project to implement the EM&A programme as identified in the approved EIA report for the Project. Mott MacDonald Hong Kong Limited (formerly known as Mott Connell Limited), on the other hand, has been appointed as the Independent Environmental Checker (IEC).
- 1.1.3 At present, there is an elevated landing/take-off helipad located at the rooftop of the Inner Pier of MFT which can accommodate Class 1 performance helicopters up to the 12-passenger S76C+. Civil Aviation Department (CAD) commissioned a consultancy study on Helicopter Traffic Demand and Heliport Development in Hong Kong in 2001. This study concluded that expansion works for the existing heliport at MFT should be carried out as soon as possible to meet the anticipated growth in cross-boundary helicopter services.
- 1.1.4 The Project therefore aims to expand the existing cross-boundary heliport at the rooftop of the MFT by adding one landing/take-off pad and a new taxiway to connect the existing and proposed new helipads connecting taxiway to the existing helipad. Upon completion of the Project, there will be two helipads operating at the MFT.
- 1.1.5 The development and operation of the Project comprises the following major items:
- Construction of a new elevated landing/take-off helipad of size of about 42m x 42m to the east of the existing helipad;
  - Construction of a taxiway to connect the existing and proposed new helipads;
  - Renovation, extension and re-location of the existing heliport supporting facilities, e.g. passenger lounge, crew office and flight control room;
  - Provision of additional means of access, e.g. escalators and access to/from the helipads; and

- Expansion of the existing helipad from size of about 29.75m x 29.75m to about 32m x 32m.

1.1.6 The layout of the Project site, with the locations of the existing and proposed landing/take-off helipads and the proposed taxiway are shown in Figure 1.

## 1.2 Coverage of this EM&A Report

1.2.1 The EM&A programme commenced with the construction of the Project on 10 April 2008. This report is the 19<sup>th</sup> Monthly EM&A report for the construction phase of the Project covering the reporting period from 10 October 2009 to 9 November 2009 inclusive. This report documents the environmental monitoring and audit works, results and findings, list of activities, and environmental mitigation measures implemented in the reporting period.

## 1.3 Project Organization and Management Structure


1.3.1 The Project organization chart is presented in Appendix A. The different project parties with their contact details are tabulated below in Table 1.

**Table 1 Key Personnel Contact Details of Different Project Parties**


Designation	Company	Name	Telephone Number
Project Proponent	Sky Shuttle Helicopters Limited	Mr. Harris Ho	2108 9947
Project Manager	Mott MacDonald Hong Kong Limited	Mr. David Ho	2828 5865
The Contractor	Hip Hing Construction Company Limited	Mr. Simon Heo	2525 9251
Environmental Team (ET) Leader	ENVIRON Hong Kong Limited	Mr. David Yeung	3743 0717
Independent Environmental Checker (IEC)	Mott MacDonald Hong Kong Limited	Dr. Anne F Kerr	2828 5793



西區海墾路

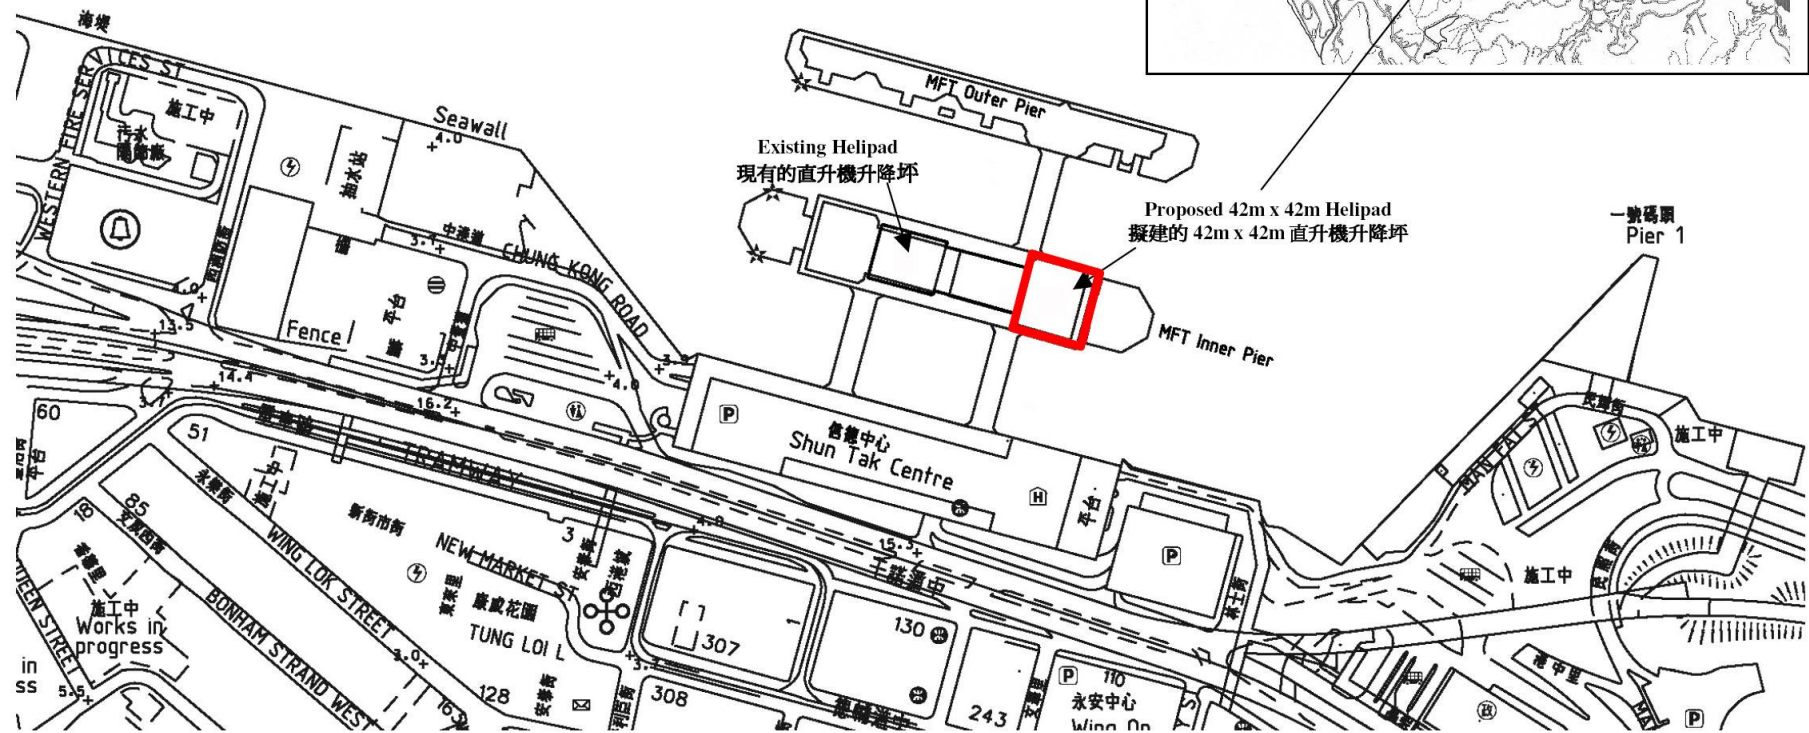

**Key Plan**

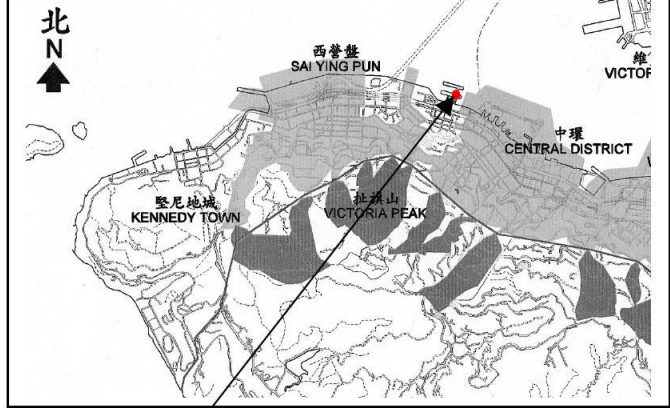

**Figure:** 1

**Title:** The Project Site Layout

**Project:** Expansion of Heliport Facilities at Macau Ferry Terminal

**ENVIRON**

Drawn by: ZL

Checked by: CC

Rev.: 1.0

Date: Jul 2008

## 2. ENVIRONMENTAL STATUS

### 2.1 Works Undertaken in the Reporting Period

2.1.1 The following construction activities have been undertaken in the reporting period:

- FRP paint defect rectification;
- Defect rectification inside the lounge area; and
- Helipad lighting replacement work.

### 2.2 Works Anticipated for the Next Reporting Period

2.2.1 The following construction activities are anticipated for the next reporting period:

- Carry out the defect rectification works;
- FRP paint defect rectification;
- Defect rectification inside the lounge area; and
- Helipad lighting replacement work.

2.2.2 The tentative construction programme showing the major construction activities is given in Appendix B.

### 2.3 Environmental Permits and Licenses

2.3.1 A summary of all the environmental permits, licenses and/or notifications to EPD for the Project is presented in Table 2 below.

**Table 2 Summary of Environmental Permits, Licenses and Notification to EPD for the Project**

Permit Type	Licenses / Permit No.	Date of Issuance by EPD	Expiry Date	Concerned Location	Status
Environmental Permit	EP-01/286/2007/A	31 Mar 2008	N/A	-	Valid
Environmental Permit	EP-286/2007/B	5 Mar 2009	N/A	-	Valid
Notification pursuant to Section 3(1) of the Air Pollution Control	Legislative requirement	4 Feb 2008	N/A	-	Valid

Permit Type	Licenses / Permit No.	Date of Issuance by EPD	Expiry Date	Concerned Location	Status
Ordinance (APCO) (Construction Dust) Regulation					
Application for Wastewater Discharge License under Water Pollution Control Ordinance (WPCO)	EP880/W10/XX0 318	8 Jul 2008	31 Jul 2013	Within the site areas of the Project	Valid
Register as a Waste Producer under Waste Disposal Ordinance	WPN: 5213-121-H2652-83	11 Jun 2008	N/A	Within the site areas of the Project	Valid
Construction Noise Permit Application under Noise Control Ordinance (NCO)	CNP No. GW-RS0280-09	11 May 2009	10 Nov 2009	Construction site and Zone A	Valid

## 2.4 Environmental Submissions

2.4.1 A summary of the environmental related document submission made for the Project in the reporting period is presented in Table 3 below.

**Table 3 Summary of Environmental Related Document Submission for the Project**

Date	Issue	EP/EIA Condition	Certified by ETL	Verified by IEC	Status
10 Mar 2008	Commencement of Construction of the Project	Condition 1.11	-	-	-
10 Mar 2008	Submission of Management Organization	Condition 2.3	-	-	-
1 Apr 2008	Submission of Complaint Investigation Procedure	Condition 3.2	N/A	N/A	Valid
22 Oct 2009	Submission of Monthly EM&A Report	Condition 3.4	Yes	Yes	Monthly Submission

## 2.5 Environmental Meetings

2.5.1 No environmental meeting among different project parties has been held in the reporting period.

### 3. EM&A REQUIREMENTS

#### 3.1 Summary of Construction Phase EM&A Requirements

3.1.1 The EM&A programme requires environmental audit for air quality, noise, water quality and waste management during construction phase of the Project as specified in the Final EM&A Manual. The EM&A requirements are presented below.

##### Air Quality

3.1.2 Site audits are required to ensure that the dust control measures presented in the EIA Report are properly implemented. Environmental audit of dust generation from the site should be carried out by the ET to ensure that any deteriorating air quality could be readily detected and timely action taken to rectify the situation. The objectives of the site audit of air quality impacts shall be:

- to identify the extent of any construction dust impacts on sensitive receivers;
- to determine the effectiveness of mitigation measures to control fugitive dust emission from activities during construction phase;
- to audit the compliance of the Contractor with regard to dust control and contract conditions;
- to recommend further mitigation measures if found to be necessary.

3.1.3 The air quality mitigation measures recommended in the EIA report and stipulated in the Air Pollution Control (Construction Dust) Regulation should be implemented to control potential dust emission from the construction site. The major dust control measures are listed below:

- every stock of more than 20 bags of cement should be covered entirely by impervious sheeting and placed in an area sheltered on the top and the 3 sides;
- all dusty materials should be sprayed with water prior to any loading, unloading or transfer operation so as to maintain the dusty materials wet;
- the load of dusty materials leaving the construction site should be covered entirely by clean impervious sheeting to ensure no leakage of the dusty materials;
- the contractor shall not burn debris or other materials on the work areas.

##### Construction Noise

3.1.4 In accordance with the EIA of the Project, insignificant construction noise impact would be anticipated, therefore noise monitoring during construction phase of the Project is not required. The only construction activities for the Project which could be a potential source of construction noise would be:

- Piling for support the steel framework structure for proposed new helipad;

- Reinforcement works for the proposed new helipad and the minor expansion of existing helipad.
- 3.1.5 In view of the limited scale of the project works and screening effect from Shun Tak Centre, significant construction noise impact on the nearest NSRs, would not be expected. However, environmental site audit was recommended to monitor the implementation of good site practices during construction phase of the Project.
- 3.1.6 As detailed in the EIA report, the following mitigation measures and site practices are recommended during the construction phase of the Project.
- Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction programme;
  - Silencers or mufflers on construction equipment should be utilised and should be properly maintained during the construction programme;
  - Mobile plant, if any, should be sited as far away from NSRs as possible;
  - Machines and plant that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum;
  - Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs.

### **Water Quality**

- 3.1.7 The construction phase water quality impact was anticipated to be temporary and localized during construction, no unacceptable residual water quality impacts were expected during the construction phase of the Project, provided that all the mitigation measures recommended in the EIA and Final EM&A Manual are properly implemented.
- 3.1.8 According to the Final EM&A Manual, implementation of regular site audits was recommended to ensure that the recommended mitigation measures are properly implemented during the construction phase of the Project. It also helps to provide an effective control of any malpractices and therefore achieve continual improvement of the environmental performance on site. Site audits shall include site inspections and compliance audits.
- 3.1.9 Site inspections shall be carried out by the ET and shall be based on the mitigation measures for water pollution control recommended in the Final EM&A Manual and presented in Section below. In the event that the recommended mitigation measures are not fully or properly implemented, deficiency shall be recorded and reported to the site management. Suitable actions are to be carried out to:
- Investigate the problems and the causes;
  - Issue action notes to the Contractor who is responsible for the works;
  - Implement remedial and corrective actions immediately;

- Re-inspect the site conditions upon completion of the remedial and corrective actions;
- Record the event and discuss with the Contractor for preventive actions.

3.1.10 Compliance audit by means of monitoring of the quality of effluent from the Works Areas, if any, is required during the construction phase of the Project. The monitoring shall be carried out at the pre-determined discharge point. Compliance audits are to be undertaken to ensure that a valid discharge license has been issued by EPD prior to any discharge of effluent from the Project site. The monitoring frequency and parameters specified in the discharge license shall be fully considered during the monitoring. All monitoring requirements shall be approved by EPD. The audit results reflect whether the effluent quality is in compliance with the discharge license requirements. The audit results are summarized in Appendix F. In case of non-compliance, suitable actions shall be undertaken to:

- Notify the site management for the non-compliance;
- Identify the sources of pollution;
- Check the implementation status of the recommended mitigation measures;
- Investigate the operating conditions of the on-site treatment systems;
- Implement corrective and remedial actions to improve the effluent quality;
- Increase monitoring frequency until the effluent quality is in compliance with the discharge licence requirements;
- Record the non-compliance and propose preventive measures.

3.1.11 Mitigation measures for water quality control during construction phase of the Project were recommended in the EIA report to minimize the adverse impacts on water quality arising from the construction works of the Project. The Contractor is responsible for the design and implementation of these mitigation measures.

3.1.12 The water quality control and mitigation measures recommended in the EIA report are presented below:

#### Construction Site Runoff and General Construction Activities

3.1.13 The practices outlined in *ProPECC PN 1/94 Construction Site Drainage* should be adopted where applicable, to minimise the potential water quality impacts from construction site runoff and various construction activities.

3.1.14 There is a need to apply to EPD for a discharge licence for discharging effluent from the construction site, if any. The discharge quality is required to meet the requirements specified in the discharge licence. Any wastewater generated from the works areas should be treated so that it satisfies all the standards listed in the *Technical Memorandum on Standards for Effluents Discharged into Drainage and Sewerage Systems, Inland and Coastal Waters (TM-DSS)*.

- 3.1.15 Good site practices should be adopted to collect the rubbish and litter on the construction sites so as to prevent the rubbish and litter from spreading from the site area. It is recommended to clean the construction sites on a regular basis.

#### Sewage from Workforce

- 3.1.16 The presence of construction workers generates sewage. The construction workers can make use of the existing toilet facilities within the MFT, as necessary. If required, sufficient portable chemical toilets should be provided in the works areas, and a licensed collector should be deployed for appropriate disposal and maintenance of the toilets on a regular basis.
- 3.1.17 Notices should be posted at conspicuous locations to remind the workers not to discharge any sewage or wastewater into the nearby environment during the construction phase of the Project.

#### Accidental Spillage of Chemicals

- 3.1.18 Any service shop and maintenance facilities should be located within a bunded area, and sumps and oil interceptors should be provided. Maintenance of equipment involving activities with potential for leakage and spillage should only be undertaken within the areas appropriately equipped to control these discharges.

#### **Waste Management**

- 3.1.19 Waste materials generated during construction activities are recommended to be audited at regular intervals to ensure that proper storage, transportation and disposal practices are being implemented. The monitoring of waste management practices would ensure that solid wastes generated during construction are not disposed of into the nearby marine waters. The Contractor shall be responsible for the implementation of any mitigation measures to minimize waste or redress problems arising from the waste materials.
- 3.1.20 Mitigation measures for waste management recommended in the EIA report are summarized below. With the appropriate handling, storage and removal of waste during the construction works as defined below, the potential to cause adverse environmental impacts could be minimized. During the site inspections, the ET shall pay special attention to the issues relating to waste management and check whether the Contractor has implemented the recommended good site practices and other mitigation measures.

#### Good Site Practices

- 3.1.21 Recommendations for good site practices during the construction activities include:
- nomination of an approved personnel, such as a site manager, to be responsible for the implementation of good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site;

- training of site personnel in site cleanliness, appropriate waste management procedures and concepts of waste reduction, reuse and recycling;
- provision of sufficient waste disposal points and regular collection for disposal;
- appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers;
- regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors.

### General Refuse

3.1.22 General refuse should be stored in enclosed bins or compaction units. A reputable waste collector should be employed by the contractor to remove general refuse from the site. An enclosed and covered area is preferred to reduce the occurrence of 'wind blown' light material.

### Chemical Wastes

3.1.23 If chemical wastes are produced at the construction site, the Contractor would be required to register with the EPD as a Chemical Waste Producer and to follow the guidelines stated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations, in particular the Waste Disposal (Chemical Waste) (General) Regulation, should be observed and complied with for control of chemical wastes. The Contractor shall use a licensed collector to transport and dispose of the chemical wastes, to either the Chemical Waste Treatment Centre at Tsing Yi, or another licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.

3.1.24 Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance details the requirements to deal with chemical wastes. General requirements are given as follows:

- Suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport;
- Chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents;
- Storage area should be selected at a safe location on site and adequate space should be allocated to the storage area.

## **3.2 Implementation of Environmental Mitigation Measures**

3.2.1 The Contractor is required to implement the mitigation measures listed in the latest EP, EIA Report and Final EM&A Manual. During regular site inspections, the Contractor's implementation of the mitigation measures is to be reviewed and inspected. A copy of the implementation schedule of recommended mitigation measures are presented in Appendix C.

## 4. MONITORING AND AUDIT RESULTS

### 4.1 Impact Monitoring and Audit in the Reporting Period

4.1.1 Regular site inspections were carried out on 15, 22 & 29 October 2009 and 5 November 2009 in the reporting period to monitor proper implementation of environmental mitigation measures and to identify possible environmental discrepancies arising from the Project. The monthly site inspection with the representatives IEC, Engineer and Contractor was carried out on 15 October 2009.

4.1.2 No impact monitoring for air quality and noise were conducted as they are not required during the construction phase of the project in accordance with the Final EM&A Manual.

4.1.3 Regular inspection and surveillance have been conducted on site by the ET during the reporting period to monitor the site effluent conditions especially at the discharge point. Since all major construction works had been completed, no effluent was observed from the remaining minor works and defect rectification works during the site inspections. As part of the compliance audit, self-monitoring would be conducted by collecting effluent samples at the site's discharge point on a quarterly basis. The effluent samples would be sent to a HOKLAS certified laboratory to analyse the effluent discharge qualities in terms of SS, COD and pH to ensure that they are in compliance with the discharge limits as specified in the Wastewater Discharge Licence (No. EP880/W10/XX0318). In addition, the Contractor had conducted daily inspection and pH check on the discharge effluent to ensure the discharge effluent is of good quality. Inspection records of the effluent discharge are presented in Appendix F.

4.1.4 The next sampling for the effluent discharge will be scheduled in November 2009.

### 4.2 Waste Management

4.2.1 The quantity of waste generated in October 2009 is summarized in Table 4 below. The summary of waste flow table in October 2009 is given in Appendix D.

**Table 4 Summary of Waste Generated in October 2009**

Waste Generated	Quantity
Inert C&D Material Generated to Public Fill (m <sup>3</sup> )	0
Metals Generated (kg)	0
Chemical Waste (L)	0
General Refuse (m <sup>3</sup> )	3.0
Paper / Cardboard Packaging (kg)	0

### 4.3 Summary of Environmental Complaints, Notifications of Summons and Prosecutions

4.3.1 A Community Liaison Office was set up and operated by the Contractor throughout the construction of the Project to receive and respond to complaints or enquiries on environmental nuisances or pollution caused by the Project and to implement remedial mitigation measures. All environmental complaints shall be referred to the ET leader and complaint investigation procedures shall be undertaken by the ET leader immediately upon receipt of environmental complaints. The complaint investigation procedures, complaint log, flow diagram and details of the Community Liaison Office are shown in Appendix E.

4.3.2 No environmental complaints were received in the reporting period. Furthermore, no notifications of summons and successful prosecution arising from the Project were received in the reporting period. Table 5 below presents the statistical summary of environmental complaints, notifications of summons and successful prosecution since the commencement of the Project.

**Table 5 Statistical Summary of Environmental Complaints, Notifications of Summons and Successful Prosecution**

Reporting Period	Complaints Logged		Notification of Summons		Successful Prosecution	
	Number	Cumulative	Number	Cumulative	Number	Cumulative
10 Apr 2008 to 9 Oct 2009	0	0	0	0	0	0
10 Oct 2009 to 9 Nov 2009	0	0	0	0	0	0

### 4.4 Environmental Exceedances / Non-Compliances

4.4.1 No impact monitoring for air quality, noise and water quality was required during the construction phase of the Project in accordance with the EM&A Manual, environmental exceedances on air quality, noise and water quality during the construction phase of the Project are not applicable.

4.4.2 No non-compliances were observed during the weekly site inspections in the reporting period. The major findings from the site inspections were summarized in Table 6 below.

**Table 6 Summary of the Findings from the Environmental Site Inspections**

Date of Inspection	ET Checklist Reference	Observations and Recommendations	Status
15 Oct 2009	HHCHELIPEM00-151009	<p>Chemical waste storage area was inspected, the emptied paint containers were properly stored inside.</p> <p>No adverse impact was observed during the joint site environmental inspection.</p>	-
22 Oct 2009	HHCHELIPEM00-221009	<p>Erection of work platform was carried out for painting rectification work. The Contractor was reminded to provide adequate preventive measures when carrying out the paint spraying works.</p> <p>Wastes were collected for disposal at site.</p> <p>Proper waste management was observed.</p> <p>The treated wastewater in water tank was observed clear.</p>	-
29 Oct 2009	HHCHELIPEM00-291009	<p>Painting rectification work was carrying out during the site inspection.</p> <p>On-site sorting of wastes and cleaning work were observed.</p>	-
5 Nov 2009	HHCHELIPEM00-051109	<p>Working platform was being dismantled after painting rectification work finished.</p>	-

## 5. FUTURE KEY ISSUES

### 5.1 Key Issues to be Considered for the Coming Month

5.1.1 The following construction activities are anticipated for the next reporting period:

- Carry out the defect rectification works;
- FRP paint defect rectification;
- Defect rectification inside the lounge area; and
- Helipad lighting replacement work.

5.1.2 The key issues to be considered for the coming month include:

- Prevent untreated wastewater discharge into Stormwater Drainage System;
- Provide adequate screening for paint rectification work and
- Remove debris and maintain good housekeeping.

### 5.2 Construction Programme for Upcoming Periods

5.2.1 The tentative construction programme for the upcoming periods of the Project is provided in Appendix B. ET will follow the Contractor's proposed construction programme to carry out waste management audit, identify major construction works, key environmental issues and suggest mitigation measures to be implemented to ensure the compliance of environmental performance and to monitor the proper implementation of all necessary environmental mitigation measures.

## 6. CONCLUSIONS AND RECOMMENDATIONS

### 6.1 Conclusions

- 6.1.1 The EM&A programme of the Project commenced on 10 April 2008.
- 6.1.2 All major construction works had been completed. The remaining minor works and defect rectification works such as FRP paint rectification, defect rectification inside the lounge area and helipad lighting replacement work were carried out in the reporting period.
- 6.1.3 Four weekly environmental site inspections were carried out in the reporting period. The monthly site inspection with the representatives IEC, Engineer and Contractor was conducted on 15 October 2009. Recommendations on environmental remedial actions were given to the Contractor to rectify the environmental deficiencies observed during the site inspection.
- 6.1.4 No site inspection was carried out by EPD in the reporting period.
- 6.1.5 Regular inspection and surveillance have been conducted by the ET during the reporting period to monitor the site effluent conditions especially at the discharge point.
- 6.1.6 Daily inspection for the discharge effluent was carried out by the Contractor and the inspection record has been checked and reviewed by the ET.
- 6.1.7 All the monitoring and audit results, if any, were checked and reviewed regularly to ensure the compliance of environmental performance and proper implementation of all necessary environmental mitigation measures.
- 6.1.8 No environmental complaints, notification of summons and successful prosecution arising from the Project were received in the reporting period.
- 6.1.9 No non-compliances with regard to site environmental inspections were observed in the reporting period.


### 6.2 Recommendations

- 6.2.1 The Contractor was recommended to implement, as far as practicable, the relevant environmental mitigation measures as stated in the EP, EM&A manual and EIA Report to prevent any non-compliance throughout the construction period and to provide construction programme and waste flow table for at least the next three months.

## **APPENDIX A**


### **Project Organization Chart**

**Environmental Permit No. EP-286/2007/B and EP-01/286/2007/A – Expansion of Heliport Facilities at Macau Ferry Terminal**

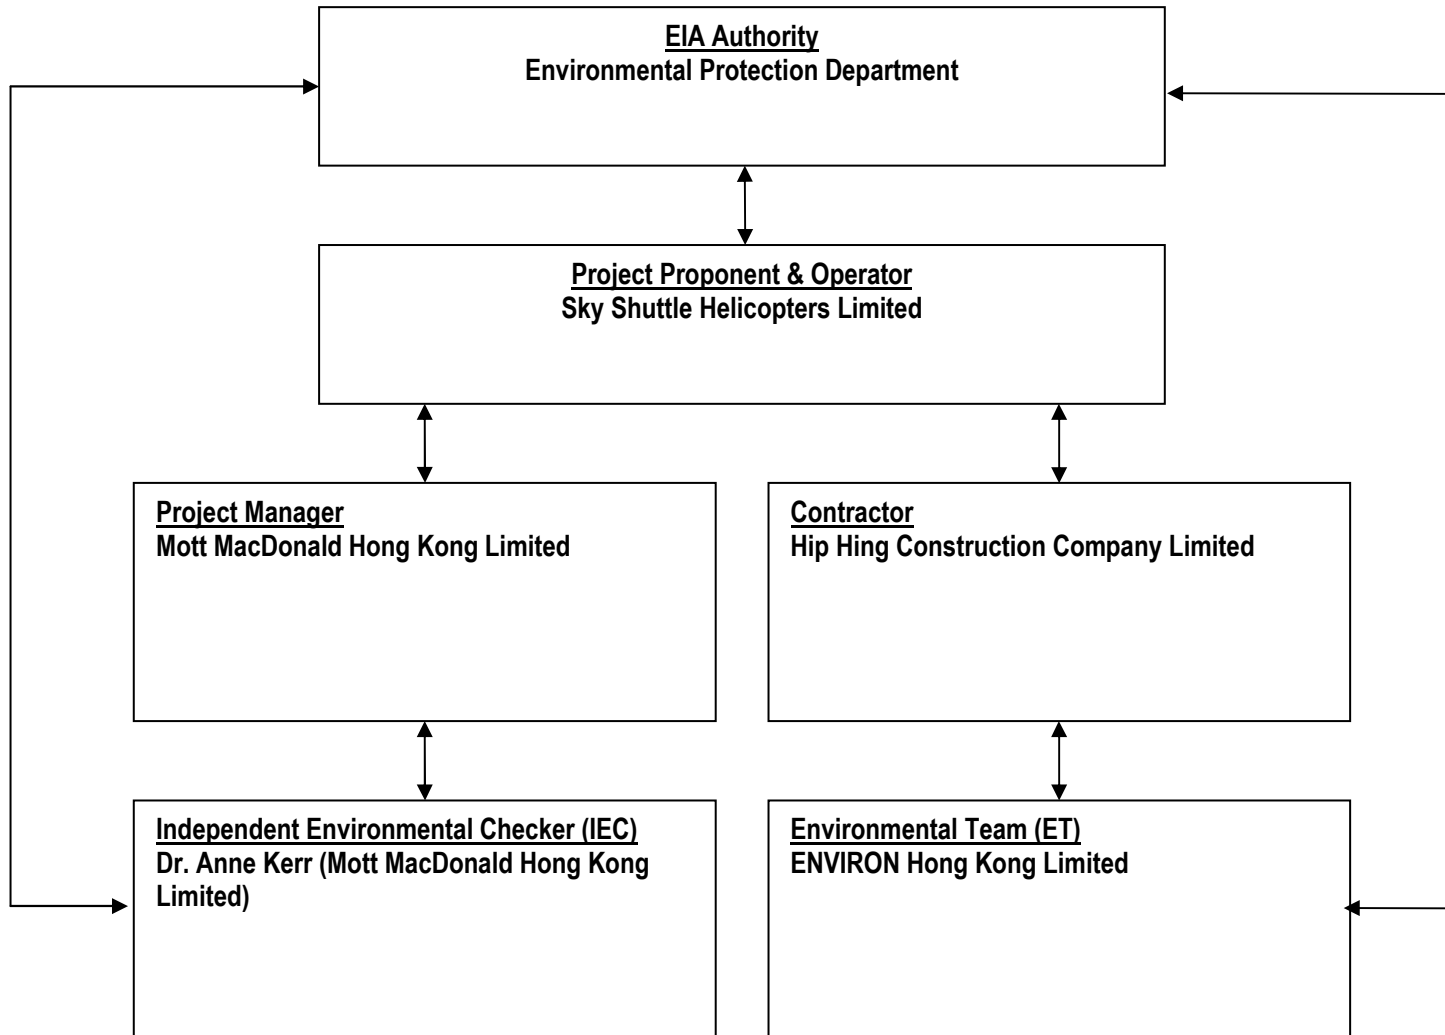

## **APPENDIX B**

### **Tentative Construction Programme of the Project**

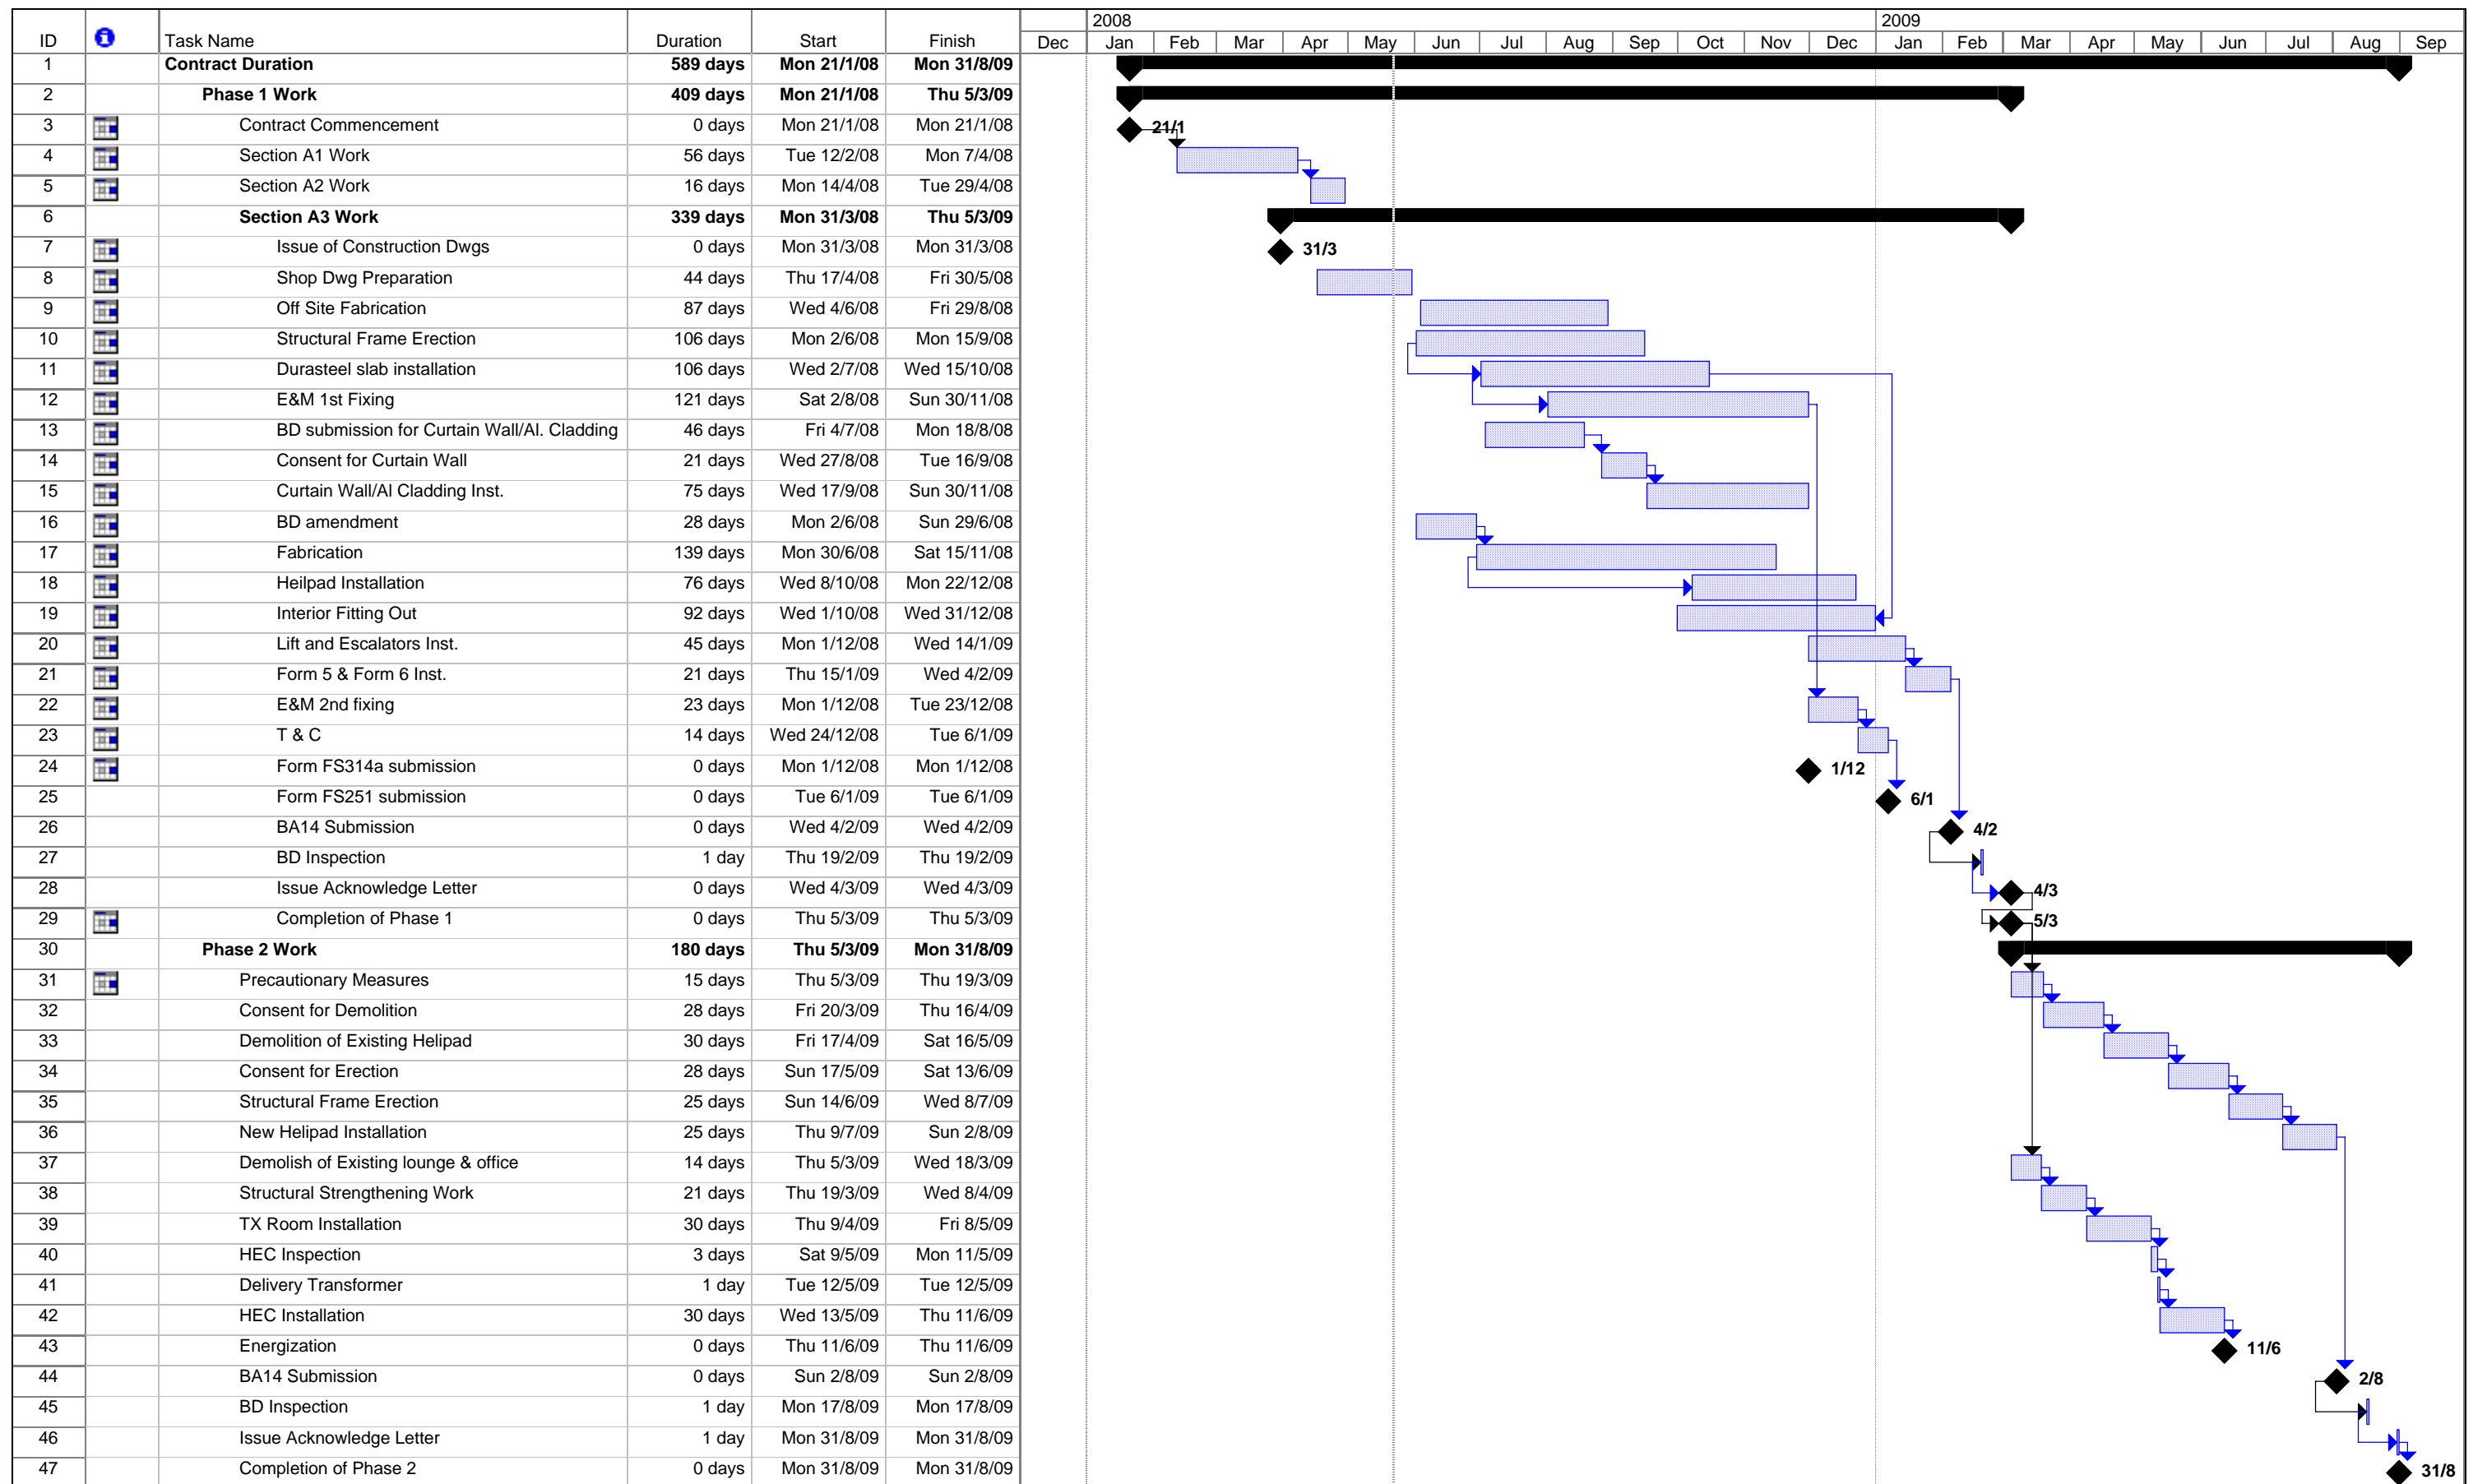

Project: Outline Programme  
Date: Thu 22/5/08

Task Progress  
Split Milestone

Summary   
Project Summary

External Tasks   
External Milestone

Deadline

## **APPENDIX C**

### **Implementation Schedule of Recommended Mitigation Measures**

**Table C.1 Implementation Schedule for Noise Control**

EIA Ref #	Environmental Protection Measures	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation and Guidelines
				D	C	O	
<b>Construction Phase</b>							
3.78	<p>The following good site practices shall be implemented:</p> <ul style="list-style-type: none"> <li>• Only well-maintained plant should be operated on-site and plant should be serviced regularly during the construction programme</li> <li>• Silencers or mufflers on construction equipment should be utilised and should be properly maintained during the construction programme</li> <li>• Mobile plant, if any, should be sited as far away from NSRs as possible</li> <li>• Machines and plant (such as trucks) that may be in intermittent use should be shut down between work periods or should be throttled down to a minimum</li> <li>• Plant known to emit noise strongly in one direction should, wherever possible, be orientated so that the noise is directed away from the nearby NSRs</li> <li>• Material stockpiles and other structures should be effectively utilised, wherever practicable, in screening noise from on-site construction activities.</li> </ul>	Work site / during construction period	Contractor		√		Noise Control Ordinance
<b>Operation Phase</b>							
3.83	The maximum allowable flight number to be operated at both existing and proposed helipad should be controlled so as to ensure same noise performance found in the EIA Report.	Operation phase	Heliport/ Helicopter Operator			√	EIAO-TM
3.82	The helicopter type of S76C+ or other helicopter types with lower noise emission level than S76C+ should be used at proposed helipad.	Operation phase	Heliport/ Helicopter Operator			√	EIAO-TM
3.88	Helicopter noise monitoring is recommended at three Noise Sensitive Receivers during the first six years of operation of the new proposed helipad. The detail EM&A requirement for noise monitoring refer to standalone EM&A Manual.	First six years of operation	Heliport/ Helicopter Operator			√	EIAO-TM

# All recommendations and requirements resulted during the course of EIA / EA Process, including ACE and / or accepted public comment to the proposed Project.  
 \* D = Design, C = Construction and O = Operation

**Table C.2 Implementation Schedule for Water Quality Control**

EIA Ref #	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation and Guidelines
				D	C	O	
<b>Construction Phase</b>							
S4.18 – S4.20	<p><i>Construction Site Runoff and General Construction Activities</i></p> <ul style="list-style-type: none"> <li>The practices outlined in ProPECC PN 1/94 Construction Site Drainage should be adopted where applicable, to minimise the potential water quality impacts from construction site runoff and various construction activities.</li> <li>There is a need to apply to EPD for a discharge licence for discharging effluent from the construction site, if any. The discharge quality is required to meet the requirements specified in the discharge licence. Any wastewater generated from the works areas should be treated so that it satisfies all the standards listed in the TM-DSS. It is anticipated that the wastewater generated from the works areas, if any, would be of small quantity.</li> <li>Good site practices should be adopted to collect the rubbish and litter on the construction sites so as to prevent the rubbish and litter from spreading from the site area. It is recommended to clean the construction sites on a regular basis.</li> <li>Scavenging service for collecting any materials/ waste loss from the site into the sea should be provided on a need basis.</li> </ul>	Work site / during construction period	Contractor		√		ProPECC PN 1/94; WPCO

# All recommendations and requirements resulted during the course of EIA / EA Process, including ACE and / or accepted public comment to the proposed Project.  
 \* D = Design, C = Construction and O = Operation

EIA Ref #	Environmental Protection Measures / Mitigation Measures	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation and Guidelines
				D	C	O	
S4.21 – S4.22	<p><i>Sewage from Workforce</i></p> <ul style="list-style-type: none"> <li>The presence of construction workers generates sewage. The construction workers can make use of the existing toilet facilities within the MFT, as necessary. If required, sufficient portable chemical toilets should be provided in the works areas, and a licensed collector should be deployed for appropriate disposal and maintenance of the toilets on a regular basis.</li> <li>Notices should be posted at conspicuous locations to remind the workers not to discharge any sewage or wastewater into the nearby environment during the construction phase of the Project. Regular environmental audit on the construction site can provide an effective control of any malpractices and can achieve continual improvement of environmental performance on site. It is anticipated that sewage generation during the construction phase of the Project would not cause water pollution problem after undertaking all required measures.</li> </ul>	Work site / during construction period	Contractor		√		ProPECC PN 1/94; WPCO
S4.23	<p><i>Accidental Spillage of Chemicals</i></p> <p>Any service shop and maintenance facilities should be located within a bunded area, and sumps and oil interceptors should be provided. Maintenance of equipment involving activities with potential for leakage and spillage should only be undertaken within the areas appropriately equipped to control these discharges.</p>	Work site / during construction period	Contractor		√		WPCO
<b>Operation Phase</b>							
S4.24	<p><i>Handling of Site Drainage and Effluent</i></p> <p>For operational stage effluent handling, treatment and disposal, the practices outlined in ProPECC PN 5/93 should be adopted where applicable.</p>	Project site/ during design stage and operational phase	Project proponent	√		√	WPCO, Building Regulations, Waste Disposal Ordinance

# All recommendations and requirements resulted during the course of EIA / EA Process, including ACE and / or accepted public comment to the proposed Project.

\* D = Design, C = Construction and O = Operation

**Table C.3 Implementation Schedule for Air Quality Control**

EIA Ref #	Environmental Protection Measures	Location / Timing	Implementation Agent	Implementation Stages *			Relevant Legislation and Guidelines
				D	C	O	
<b>Construction Phase</b>							
S5.26	Dust mitigation measures stipulated in the <i>Air Pollution Control (Construction Dust) Regulation</i> shall be incorporated to control dust emission. Major control measures relevant to this Project are listed below: <ul style="list-style-type: none"> <li>• skip hoist for material transport should be totally enclosed by impervious sheeting;</li> <li>• any furnace, boiler or other plant or equipment or use any fuel that might in any circumstance produce smoker should not be installed;</li> <li>• the contractor shall not burn debris or other materials on the work areas.</li> </ul>	Work site / during construction period	Contractor		√		Air Pollution Control (Construction Dust) Regulation
<b>Operation Phase</b>							
N/A	N/A	N/A	N/A				

# All recommendations and requirements resulted during the course of EIA / EA Process, including ACE and / or accepted public comment to the proposed Project.

\* D = Design, C = Construction and O = Operation

N/A Not applicable

**Table C.4 Implementation Schedule for Waste Management**

EIA Ref #	Environmental Protection Measures/Mitigation Measures	Location/ Timing	Implementation Agent	Implementation Stages *				Relevant Legislation and Guidelines
				Des	C	O	Dec	
S6.20	<p><i>Good Site Practices</i>                      Good site practices during the construction activities include:</p> <ul style="list-style-type: none"> <li>• Nomination of an approved personnel, such as a site manager, to be responsible for the implementation of good site practices, arrangements for collection and effective disposal to an appropriate facility, of all wastes generated at the site.</li> <li>• Training of site personnel in site cleanliness, appropriate waste management procedures and concepts of waste reduction, reuse and recycling.</li> <li>• Provision of sufficient waste disposal points and regular collection for disposal.</li> <li>• Appropriate measures to minimise windblown litter and dust during transportation of waste by either covering trucks or by transporting wastes in enclosed containers.</li> <li>• Regular cleaning and maintenance programme for drainage systems, sumps and oil interceptors.</li> <li>• A Waste Management Plan shall be prepared in accordance with ETWB TCW No. 15/2003 and submitted to the Engineer for approval.</li> </ul>	Work site / During the construction period	Contractor		√			Waste Disposal Ordinance (Cap.54), ETWB TCW No. 15/2003
S6.21	<p><i>General Refuse</i>                      General refuse shall be stored in enclosed bins or compaction units. A reputable waste collector shall be employed by the contractor to remove general refuse from the site. An enclosed and covered area is preferred to reduce the occurrence of 'wind blown' light material.</p>	Work site / During the construction period	Contractor		√			Public Health and Municipal Services Ordinance (Cap. 132)
S6.22 – S6.23	<p><i>Chemical Wastes</i>                      If chemical wastes are produced at the construction site, the Contractor would be required to register with the EPD as a Chemical Waste Producer and to follow the guidelines stated in the Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes. The Waste Disposal Ordinance (Cap 354) and its subsidiary regulations, in particular the Waste Disposal (Chemical Waste) (General) Regulation, should be observed and complied with for control of chemical wastes. The Contractor shall use a licensed collector to transport and dispose of the chemical wastes, to either</p>	Work site / During the construction period	Contractor		√			

EIA Ref #	Environmental Protection Measures/Mitigation Measures	Location/ Timing	Implementation Agent	Implementation Stages *				Relevant Legislation and Guidelines
				Des	C	O	Dec	
	<p>the Chemical Waste Treatment Centre at Tsing Yi, or another licensed facility, in accordance with the Waste Disposal (Chemical Waste) (General) Regulation.</p> <p>Disposal of chemical wastes should be carried out in compliance with the Waste Disposal Ordinance. The Code of Practice on the Packaging, Labelling and Storage of Chemical Wastes published under the Waste Disposal Ordinance details the requirements to deal with chemical wastes. General requirements are given as follows:</p> <ul style="list-style-type: none"> <li>• Suitable containers should be used to hold the chemical wastes to avoid leakage or spillage during storage, handling and transport.</li> <li>• Chemical waste containers should be suitably labelled, to notify and warn the personnel who are handling the wastes, to avoid accidents.</li> <li>• Storage area should be selected at a safe location on site and adequate space should be allocated to the storage area.</li> </ul>							

# All recommendations and requirements resulted during the course of EIA / EA Process, including ACE and / or accepted public comment to the proposed Project.  
\* Des = Design, C = Construction, O = Operation and Dec = Decommissioning

**APPENDIX D**

**Summary of Waste Flow Table**

## Appendix D - Monthly Summary Waste Flow Table for 2009

Month	Actual Quantities of Inert C&D Materials Generated Monthly										Actual Quantities of C&D Wastes Generated Monthly										
	Total Quantity Generated		Broken Concrete (see Note 3)		Reused in the Contract		Reused in other Projects		Disposed as Public Fill		Metals		Paper/ cardboard packaging		Plastics (see Note 2)		Chemical Waste		Others, e.g. general refuse		
	(in '000m <sup>3</sup> )		(in '000m <sup>3</sup> )		(in '000m <sup>3</sup> )		(in '000m <sup>3</sup> )		(in '000m <sup>3</sup> )		(in '000 kg)		(in '000kg)		(in '000kg)		(in 'L)		(in '000m <sup>3</sup> )		
	Est.	Act.	Est.	Act.	Est.	Act.	Est.	Act.	Est.	Act.	Est.	Act.	Est.	Act.	Est.	Act.	Est.	Act.	Est.	Act.	
Jan	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	1.00	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0030	0.0030
Feb	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	1.00	0.000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0030	0.0030
Mar	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.32	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0030	0.0030
Apr	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0030	0.0030
May	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	30.00	0.000	0.0000	0.0000	0.0000	0.0000	0.0000	2000.0	0.0030	0.0030
June	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	30.00	77.21	0.0000	0.0000	0.0000	0.0000	1000.0	2000.0	0.0030	0.0030
<b>Sub-total</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>62.00</b>	<b>77.53</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>1000.0</b>	<b>4000.0</b>	<b>0.0180</b>	<b>0.0180</b>
July	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	20.00	0.0000	0.0000	0.0000	0.0000	0.0000	3000.0	0.0000	0.0030	0.0030
Aug	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	10.00	97.94	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0030	0.0030
Sept	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	140.00	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0030	0.0030
Oct	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0030	0.0030
Nov																					
Dec																					
<b>Total</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>232.00</b>	<b>175.07</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>0.0000</b>	<b>4000.0</b>	<b>4000.0</b>	<b>0.0300</b>	<b>0.0300</b>

Notes:

- 1) The waste flow table shall also include C&D materials that are specified in the Contract to be imported for use at the Site.
- 2) Plastics refer to plastic bottles/containers, plastic sheets/foam from packaging material
- 3) Broken concrete for recycling into aggregates

## **APPENDIX E**

### **Complaint Investigation Procedures, Complaint Log, Flow Diagram and Details of Community Liaison Office**

## Complaint Investigation Procedures

A Community Liaison Office shall be set up and operated throughout the construction of the Project to receive and respond to complaints or enquires on environmental nuisances or pollution caused by the Project and to implement remedial mitigation measures.

All complaints should be referred to the ET Leader for action. The ET Leader shall undertake the following procedures upon receipt of any complaint:

- (i) log complaint and date of receipt onto the complaint database and inform the IC(E) immediately;
- (ii) investigate the complaint to determine its validity, and assess whether the source of the problem is due to works activities;
- (iii) identify mitigation measures in consultation with the IC(E) if a complaint is valid and due to works;
- (iv) advise the Contractor if mitigation measures are required;
- (v) review the Contractor's response to identified mitigation measures, and the updated situation;
- (vi) if the complaint is transferred from the EPD, submit interim report to the EPD on status of the complaint investigation and follow-up action within the time frame assigned by the EPD;
- (vii) undertake additional monitoring and audit to verify the situation if necessary, and review that circumstances leading to the complaint do not recur;
- (viii) report investigation results and subsequent actions to complainant (if the source of complaint is transferred from EPD, the results should be reported within the timeframe assigned by the EPD);
- (ix) record the complaint, investigation, the subsequent actions and the results in the monthly EM&A reports.


During the complaint investigation work, the Contractor, ER and Community Liaison Office shall cooperate with the ET Leader in providing all the necessary information and assistance for completion of the investigation. If mitigation measures are identified in the investigation, the Contractor shall promptly carry out the mitigation. The ER shall ensure that the measures have been carried out by the Contractor.


After the complaint is settled, the Community Liaison Office should respond to the complainant and close the complaint.

A complaint log form is shown in Appendix A while an environmental complaint flow diagram is shown in Figure E1. Details of the Community Liaison Office is shown in Figure E2.

### COMPLAINT LOG

Log Ref.	Location	Received Date	Details of Complaint	Investigation / Mitigation Action	Status

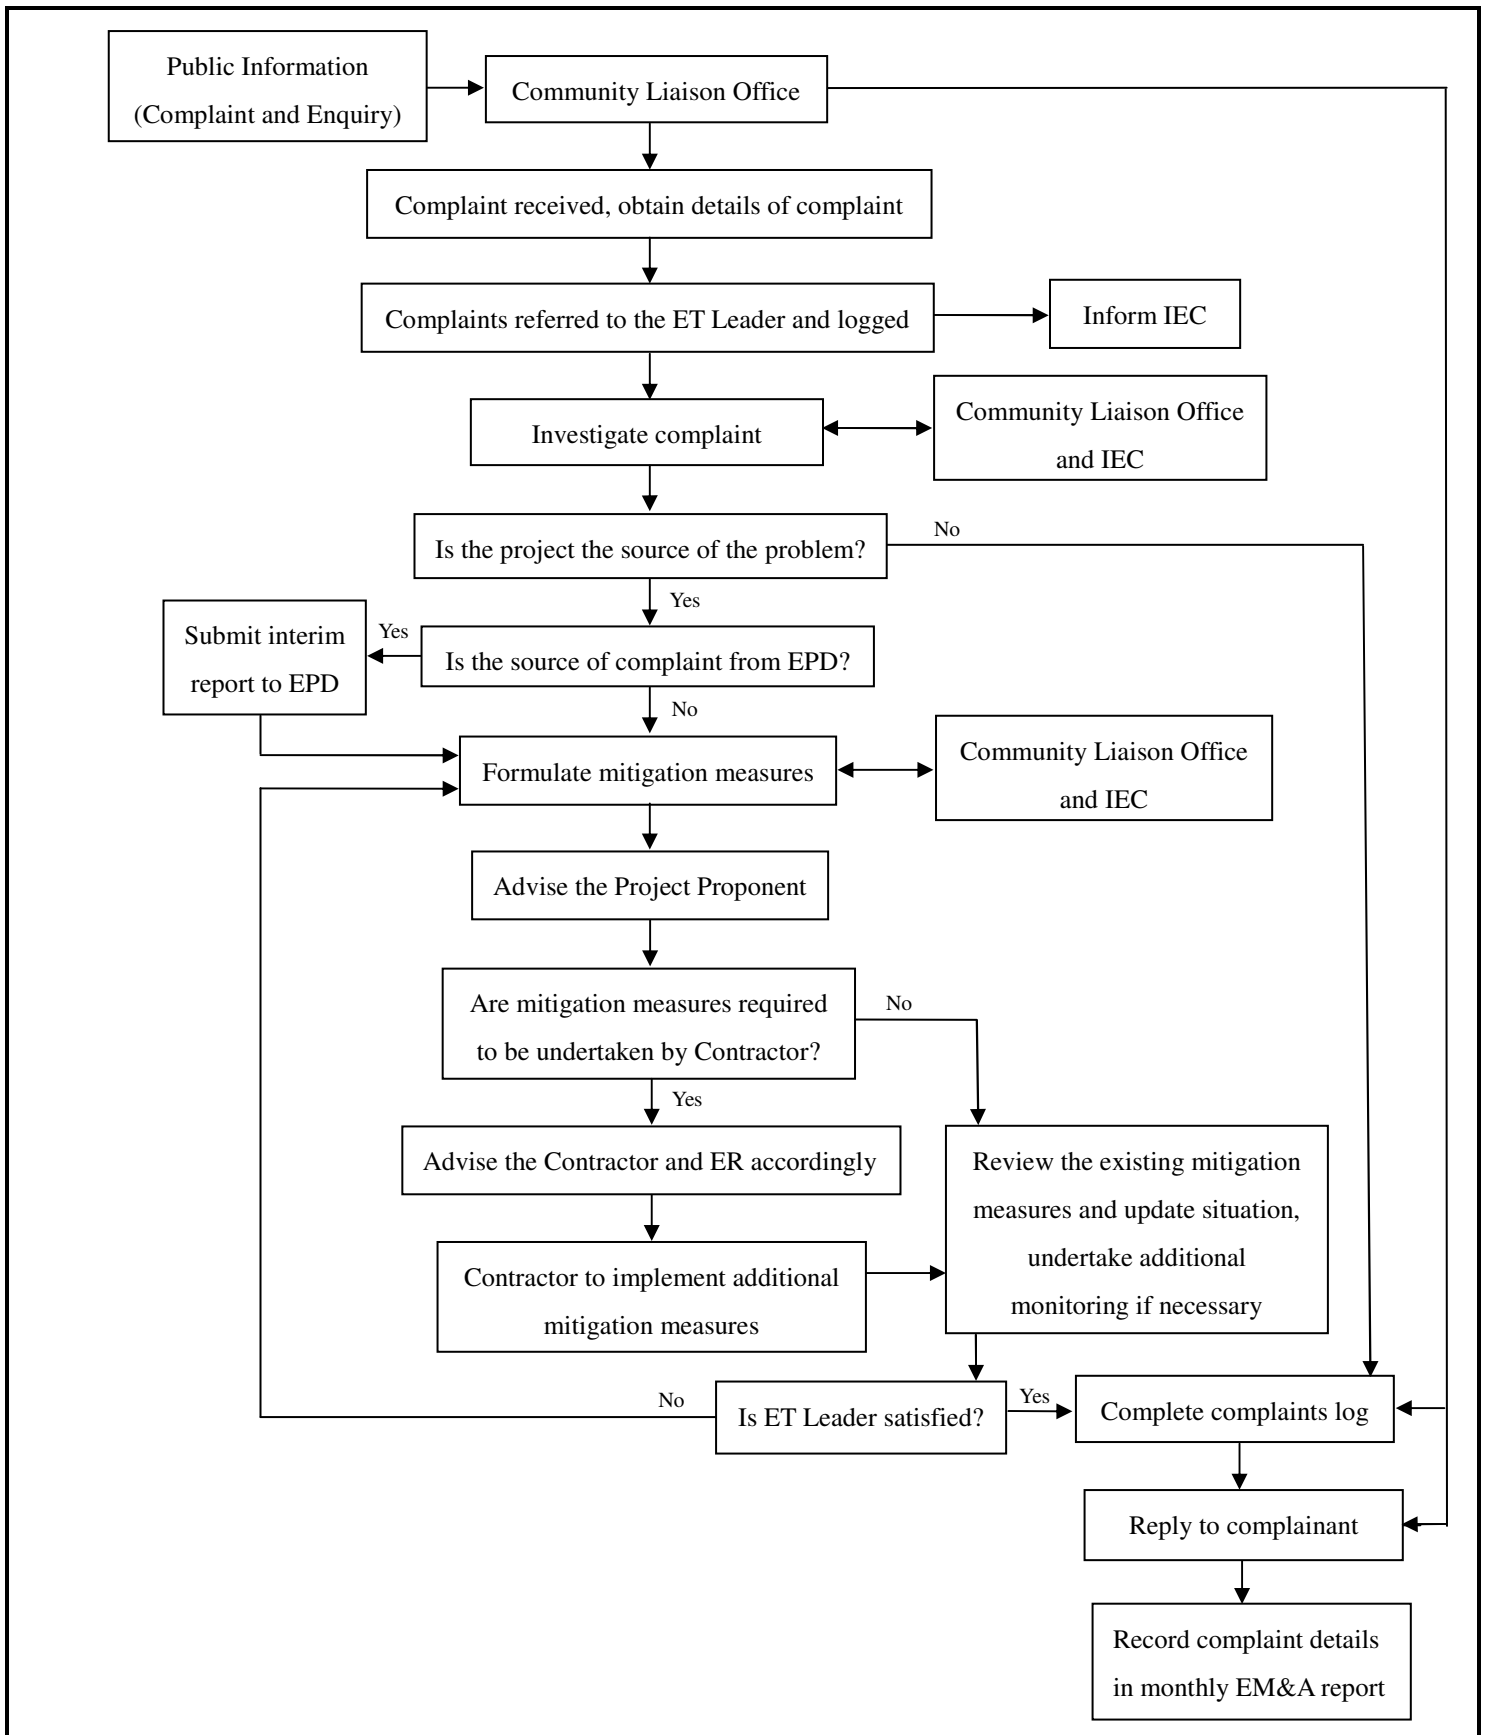


<b>Appendix: E1</b>	
<b>Title:</b> Environmental Complaint Flow Diagram	Drawn by: JL
<b>Project:</b> Environmental Consultancy for New Heliport at HK Macau Ferry Terminal	Checked by: CC
	Rev.: 1.0
	Date: Mar 2008

## **Community Liaison Office**

Sky Shuttle Helicopters Limited  
Room 1603, China Merchants Tower,  
Shun Tak Centre, 200 Connaught Road,  
Central, Hong Kong.

## **Hotline and Contact Person**

Hotline : 2108-9947  
Fax : 2108-9938  
Contact Person : Mr. Ivan Fong

<b>Appendix:</b> E2	
<b>Title:</b> Details of the Community Liaison Office	Drawn by: JL
	Checked by: CC
<b>Project:</b> Environmental Consultancy for New Heliport at HK Macau Ferry Terminal	Rev.: 1.0
	Date: May 2009

## **APPENDIX F**

### **Inspection Records of the Effluent Discharge**

## 工地每日污水排放和處理機檢查記錄表

1. 機工須定出一個指定時段(例如上午九時至十一時)為每日污水排放檢查時間，在這個時間檢查污水處理機之運作和污水排放的水質。
2. 依照檢查表的項目去檢查污水處理機，觀察污水排放的水質，決定是否需要排泥、清洗、調節添加化學劑數量。
3. 根據 "EOCP C05 工地 水每天清濁檢查及酸鹼測試程序" 測試水質。
4. 將檢查結果記錄於表格內。 (✓) 表示滿意/附合標準、(×) 表示須要改善/不合標準 (N/A) 表示不適用
5. 若污水處理機發生故障不能正常運作，機工須立刻停止排水，並通知工程項目經理或工地環境代表發出不符合報告，直至污水處理機修理好污水符合標準後才可排放。
6. 工地環境代表須將不符合報告的編號記錄在備註列中。
7. 機工須要每月清洗污水處理機至少一次，以確保處理機正常運作。
8. 機工須要每星期用清水沖洗酸鹼值感應器，以保持其敏感度。

工地名稱： <u>港澳碼頭直昇機場擴建</u>	工地編號： <u>H200802</u>
機工姓名： <u>鄧國宜</u>	檢查/測試時段： <u>9:00</u>
污水處理機型號： <u>N/A</u>	

排放標準： 懸浮固體 (SS) = <u>少於 50</u> mg/L 酸鹼值 (pH) = <u>6-9</u>
---

日期:2009	檢查事項					污水處理機的維修		排放水質檢查		檢查員簽署	備註
	污水處理機已 接上電源	進水系統沒 有阻塞	化學劑投加泵 操作正常	污水處理機喉管 沒有泄漏	酸鹼值顯示 正常	已清洗污水處 理機	已清洗酸鹼值 感應器	排放污水的清 濁度	污水的酸 鹼值		
10月2日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8	鄧	
10月5日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7	鄧	
10月6日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7		
10月7日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7		
10月8日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8		
10月9日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8		

10月10日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8	靜	
10月12日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8	靜	
10月13日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7		
10月14日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7		
10月15日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7		
10月16日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7		
10月17日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7		
10月19日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8		靜
10月20日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8	靜	
10月21日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8		
10月22日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8		
10月21日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8		
10月24日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7		
10月27日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7	靜	
10月28日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7	靜	
10月29日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	7		
10月30日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8		
10月31日	不適用	不適用	不適用	不適用	不適用	不適用	不適用	清/濁	8		